
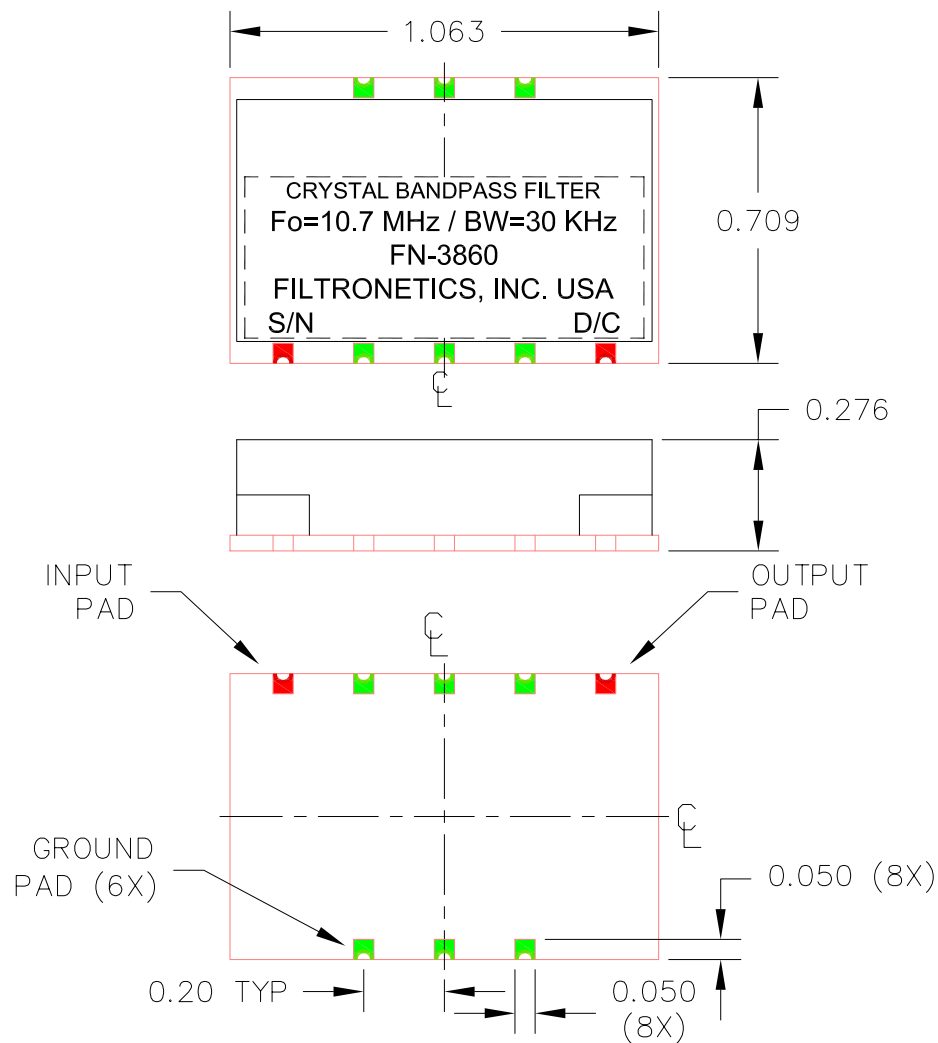


BANDPASS FILTER

Fo: 10.7 MHz
IMPEDANCE : 5500 OHMS // -1 pF (IN & OUT)
3 dBc BAND WIDTH: 30 KHz MIN
INSERTION LOSS: 2.5 dB MAX
PASSBAND RIPPLE: 1.0 dB MAX ±10 KHz
30 dBc BAND WIDTH: 80 KHz MAX
40 dBc BAND WIDTH: 100 KHz
ULTIMATE ATTENUATION: 40 dB MIN to ±300 KHz
SPURIOUS ATTENUATION: 30 dB MIN
OPERATING TEMPERATURE : -35 to +70°C

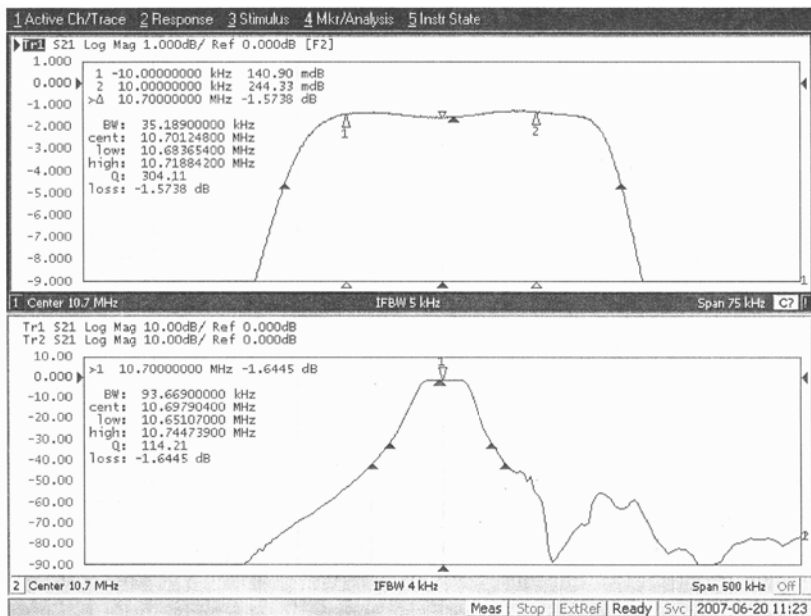

FN-3860W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 1/31/08