


BANDPASS FILTER



Fo: 158 MHz
 IMPEDANCE : 50 ohms IN/OUT
 INSERTION LOSS: 5.0 dB MAX
 RIPPLE: 0.5 dB MAX
 3dB BANDWIDTH: 5 MHz MIN
 60dB BANDWIDTH: 18 MHz MAX
 ULTIMATE ATTENUATION 70 dB, DC to 80 MHz
 ABSOLUTE GROUP DELAY @ Fo: 450 nSEC MAX
 GROUP DELAY VARIATION (± 2 MHz): 200 nSEC MAX
 OPERATING TEMPERATURE : 0°C to +71°C

FN-4224W

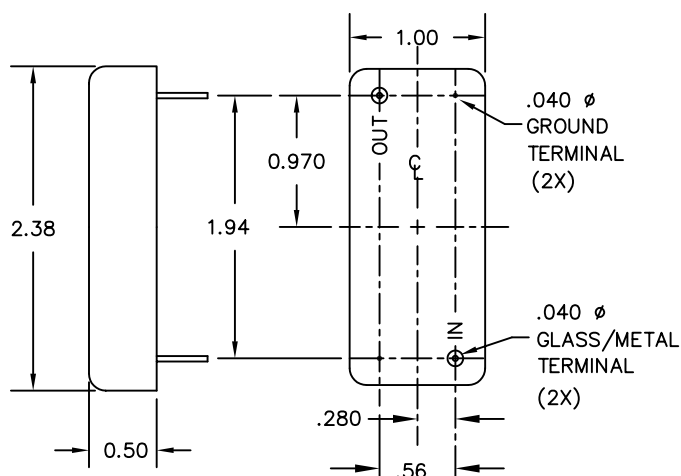

FN-4224WB

FN-4224W

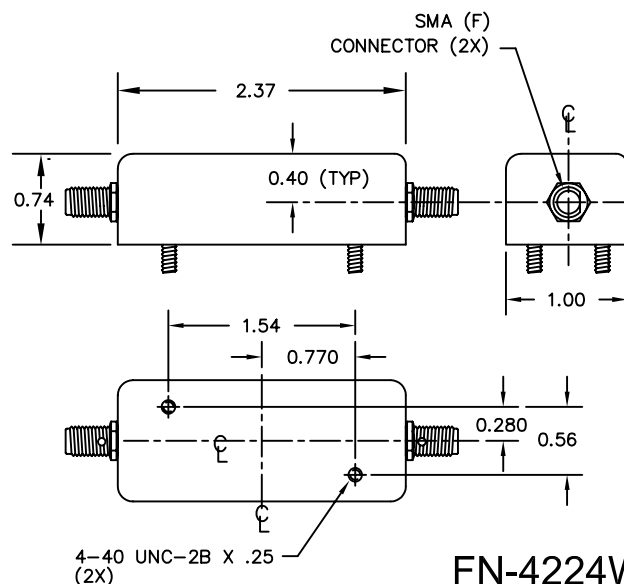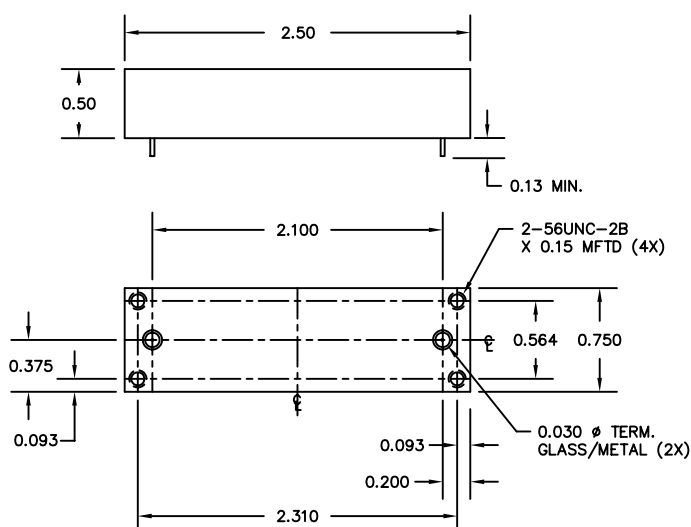

FN-4224WF

FN-4224WK

FN-4224W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 10/20/2010

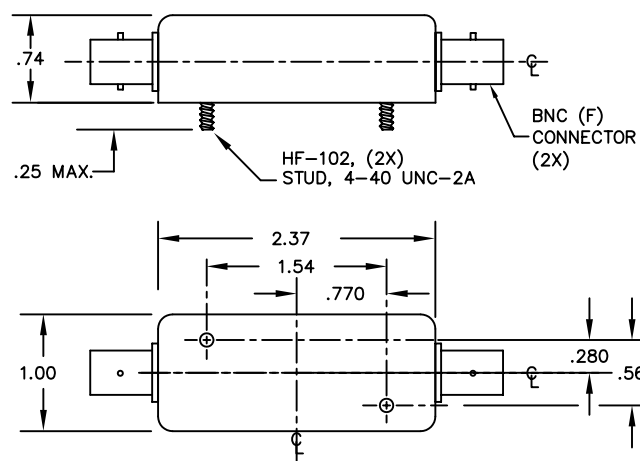

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
 DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.