



Fo: 158.76 MHz
 IMPEDANCE : 50 OHMS
 INSERTION LOSS: 8.0 dB MAX
 RIPPLE: 0.5 dB MAX
 3 dBc BANDWITH 5 MHz MIN
 60 dBc BANDWITH 18 MHz MAX
 ULTIMATE ATTENUATION: 70 dBc MIN
 OPERATING TEMPERATURE : 0° TO 71° C

FN-4230WF

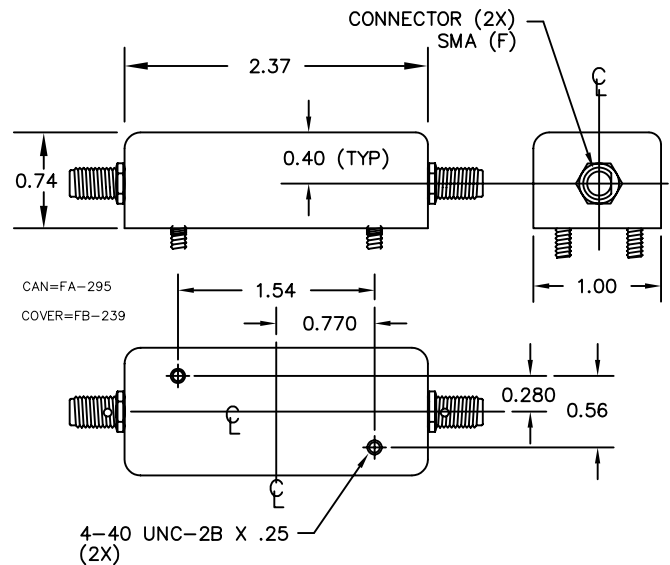


MARKING


FN-4230WGG

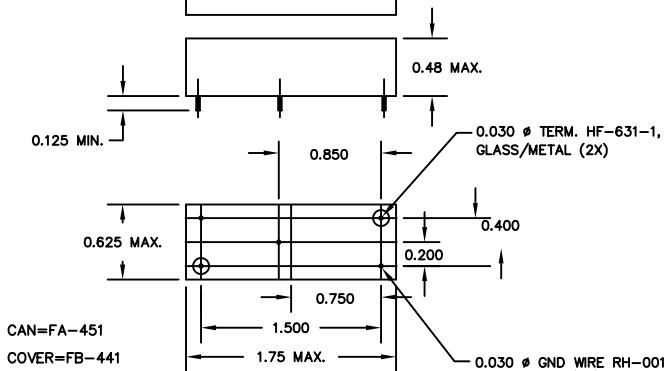

FN-4230WK

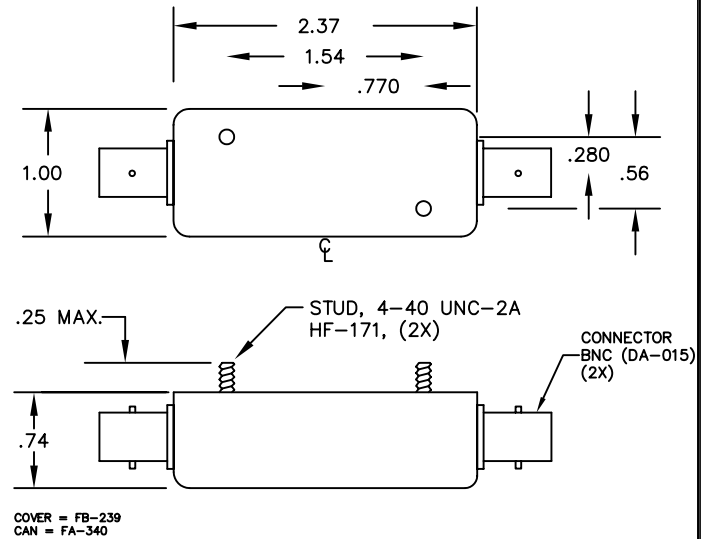

FN-4230WFF

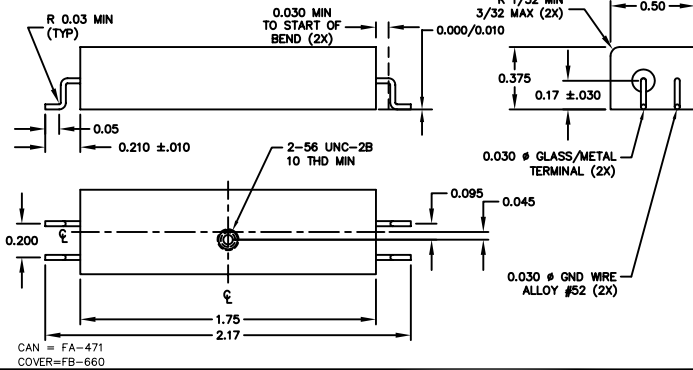

FN-4230W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm$.020
 .XXX = $\pm$.010

ANGLE = $\pm$ 1°
 HOLES = $\pm$.002

REVISED 10/12/2012 PER ECO 4423

FN-4230WK-2

