

LC BAND PASS FILTER

Fo: 220.6 MHz

IMPEDANCE : 50 OHMS

INSERTION LOSS: 13 dB MAX

RIPPLE: 1.0 dB MAX

3 dBc BANDWIDTH: ±1 MHz

50 dBc BAND WIDTH: ±8.6 MHz MAX


INPUT POWER: +15 dBm MAX / +30 dBm

WITHOUT DAMAGE

OPERATING TEMPERATURE : -20° TO 65° C

WORKSMANSHIP: J-STD-001 CLASS 2

RoHS COMPLIANT: NO

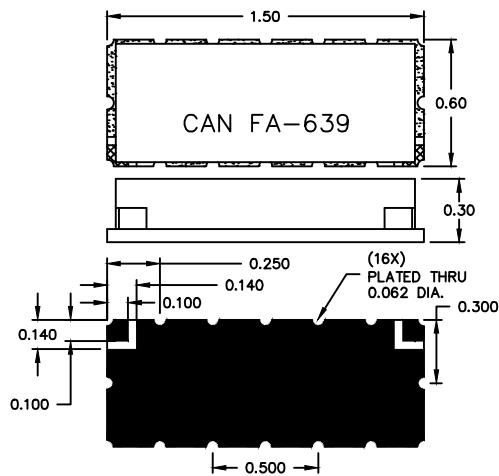

FN-4285W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 06/01/2012