
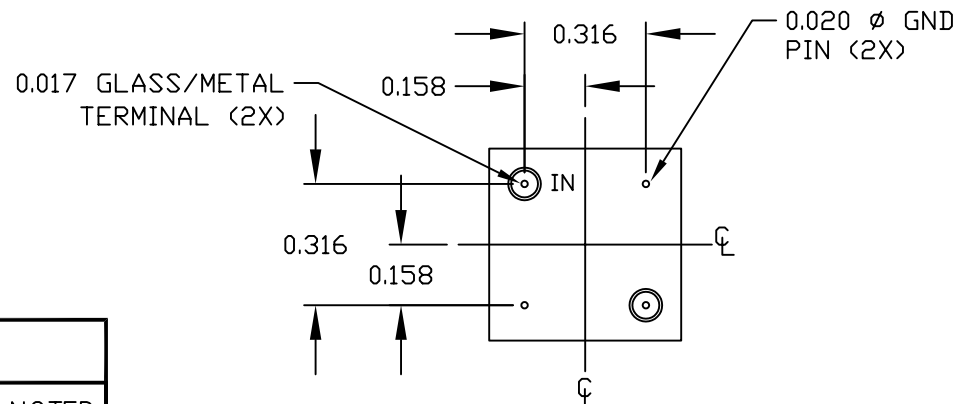


LC BAND PASS FILTER

CENTER FREQUENCY (Fo): 10.7 MHz
 INSERTION LOSS: 12 dB MAX at Fo
 3 dB BAND WIDTH: 750 KHz MIN
 PASS BAND RETURN LOSS @ Fo In/Out: 13 dB MIN
 40 dBc BAND WIDTH: 2.5 MHz
 ATTENUATION 1 MHz TO 9.5 MHz: 40 dB MIN
 ATTENUATION 180 MHz TO 200 MHz: 60 dB MIN
 INPUT POWER: 0.5 Watt MAX
 IMPEDANCE : 50 ohms
 OPERATING TEMPERATURE: -30°C TO +60°C
 WORKMANSHIP: J-STD-001
 RoHS COMPLIANT: NO

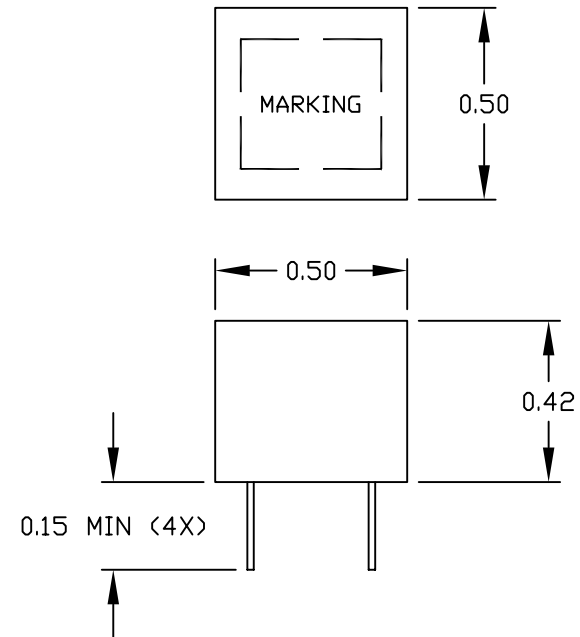

CAN = FA-551

COVER=FB-538

FN-4364W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 04/08/2013