


LC BAND PASS FILTER


CENTER FREQUENCY (Fo) : 160 MHz
 3 dB BAND WIDTH: 40 MHz MIN
 INSERTION LOSS: 4 dB MAX
 PASS BAND RIPPLE: 1 dB MAX
 50 dBc BAND WIDTH: 90 MHz MAX
 OPERATING POWER: +10 dBm MAX
 IMPEDANCE : 50 OHMS
 OPERATING TEMPERATURE : -40° C TO +75° C
 WORKMANSHIP: J-STD-001
 RoHS COMPLIANT: NO

SILK SCREEN SIZE= 1.6 x .60


FN-4381WBB

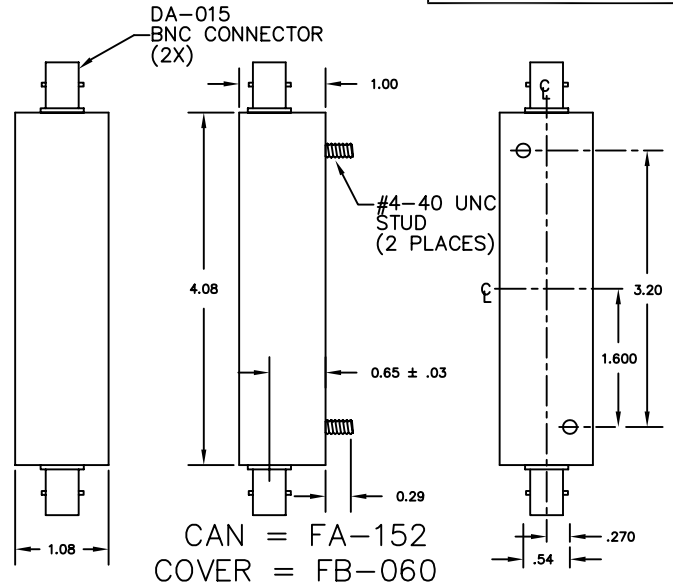

FN-4381W

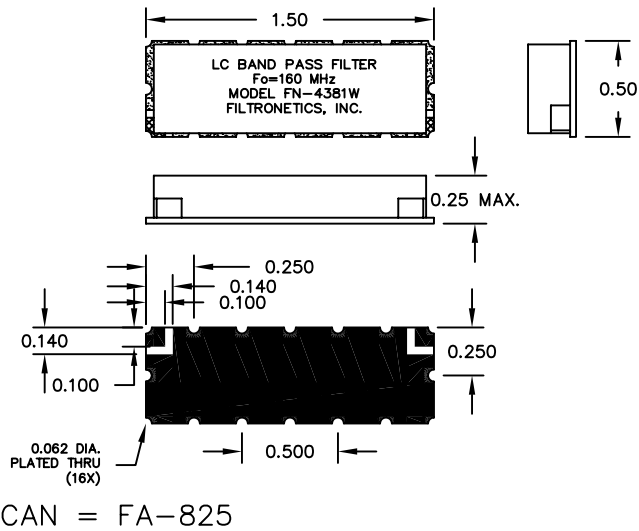

FN-4381WE

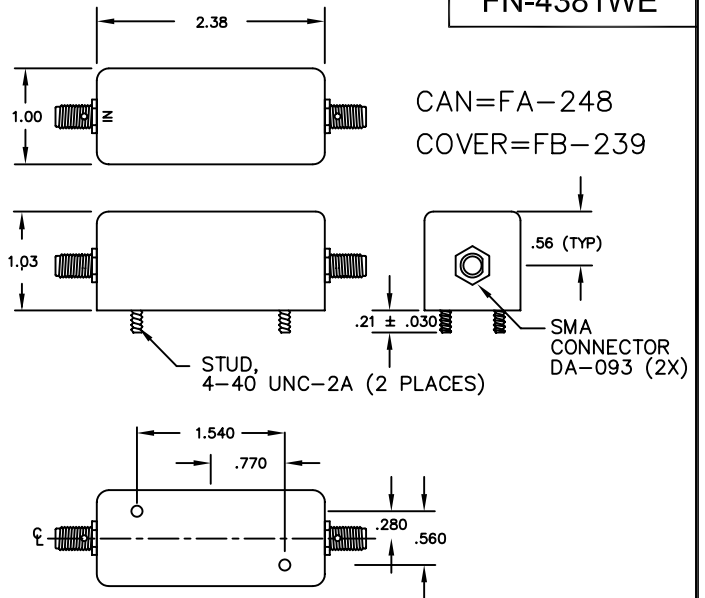

FN-4381W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 01/30/2013