

Fo: 70 MHz

1dB BANDWIDTH: ± 35 KHz MIN

INSERTION LOSS: 5dB MAX


RIPPLE: 1dB MAX

STOP BAND AT $F_o \pm 100$ KHz: 60 dB MIN

OPERATING TEMPERATURE : -20 TO +85°C

CAN = FA-712
COVER=FB-682


FN-4473WT

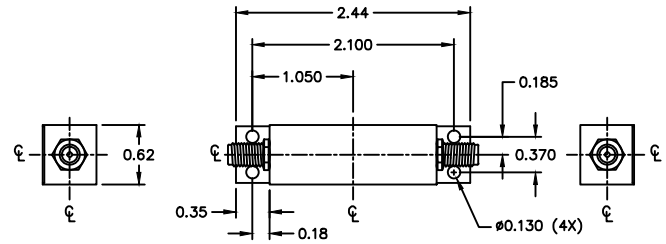

SMA CONNECTOR FEMALE
2X (REF DA-093)

CAN: FA-512
COVER: FB-500


FN-4473WMM

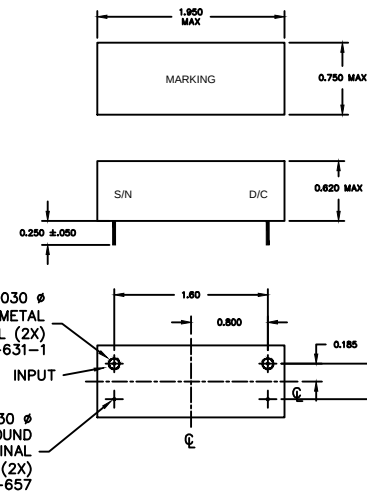

CAN = FA-712
COVER=FB-682

FN-4473WK

NOTE:
SHIP WITH 4-40 LOCKWASHERS
AND HEX NUTS.

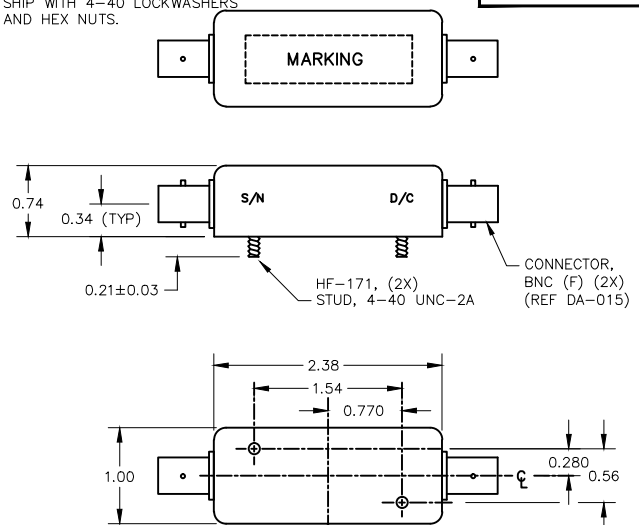

CAN = FA-340
COVER=FB-239

FN-4473W



CAN = FA-565
COVER=FB-552

FN-4473W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120

816-231-7375

FAX 816-241-0368

WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$

.XXX = $\pm .010$

ANGLE = $\pm 1^\circ$

HOLES = $\pm .002$

REVISED 2/26/2019