

Center Frequency
 1 dB Band Width:
 3 dB Band Width:
 Insertion Loss:
 Pass Band Ripple:
 35 dBc Band Width:
 Attenuation


Group Delay Variation:
 Input Power:
 Impedance:
 Operating Temperature:
 Storage Temperature:
 Workmanship:
 RoHS Compliant

(Fo) 10.7 MHz
 760 KHz Nominal
 860 KHz -30/+50
 25dB Min 29 dB Max
 ± 0.5 dB Max
 1520 KHz Max

3 MHz to 9.4 MHz / 40 dB
 12 MHz to 20 MHz / 40 dB
 $F_o \pm 258$ KHz ± 100 nSec Max
 0 dBm Max
 50 Ohms
 -40°C to $+85^{\circ}\text{C}$
 -55°C to $+125^{\circ}\text{C}$
 J-STD-001
 NO

Customer Installation Temperature Case temperature not to exceed $+170^{\circ}\text{C}$.

FN-4503W

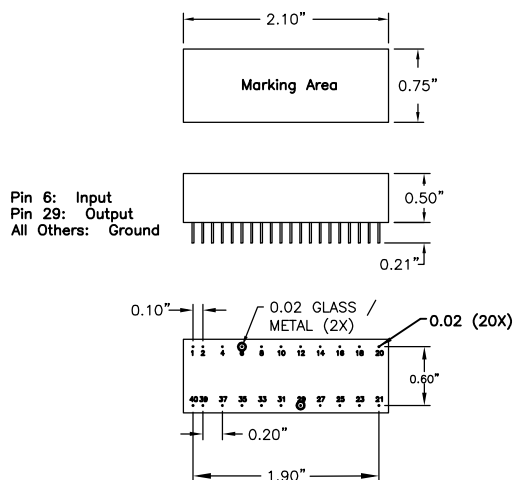

FN-4503W

FILTRONETICS, INC.

6010 PARRETTA DR. KANSAS CITY, MO
 64120 816-231-7375 FAX 816-241-0368
 WWW.FILTRO.NET