


# LOWPASS FILTER

**Fc:** 1.5 KHz  
**IMPEDANCE :** 10 KOHMS (IN & OUT)  
**INSERTION LOSS :** 0.5 dB MAX  
**RIPPLE :** 0.5 dB MAX  
**1 dB CUTOFF :** 1.35 KHz MIN  
**3 dB CUTOFF :** 1.5 KHz MIN  
**30dB ATTENUATION:** 1.9 KHz MAX  
**OPERATING TEMPERATURE :** -20°C TO +70°C

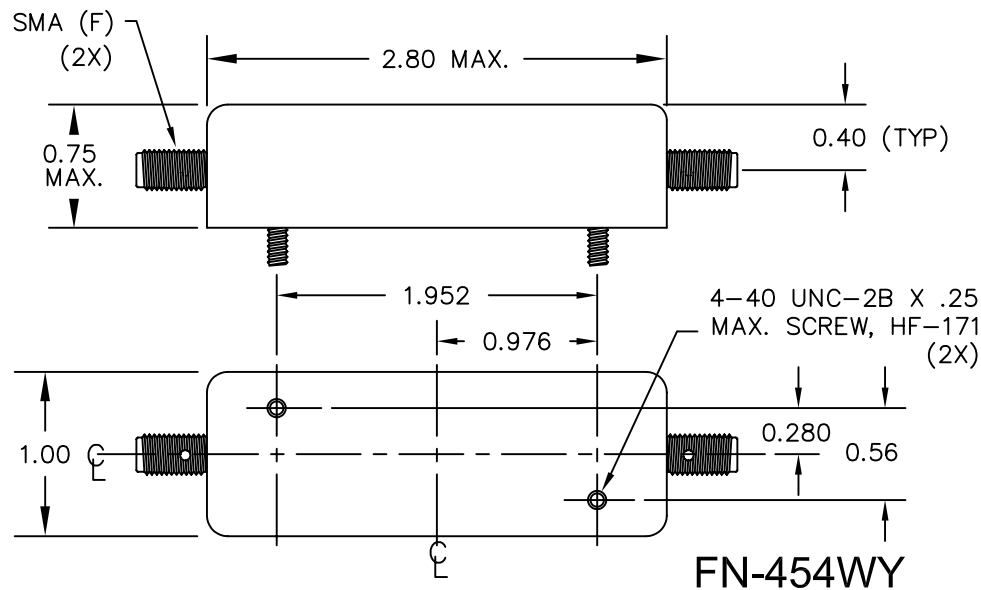

## FN-454W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 6/3/2004

# FN-454WBB

