

LC LOWPASS FILTER

3 dB CUTOFF: 350MHz

55 dB ATTENUATION: 400 MHz to 3 GHz Min

RETURN LOSS (15dB GOAL): DC to 245MHz


INPUT POWER: 0dBm Max

WORKMANSHIP: J-STD-001

RoHS COMPLIANT: NO



OPERATING TEMPERATURE : Room or Advise

FN-4570W

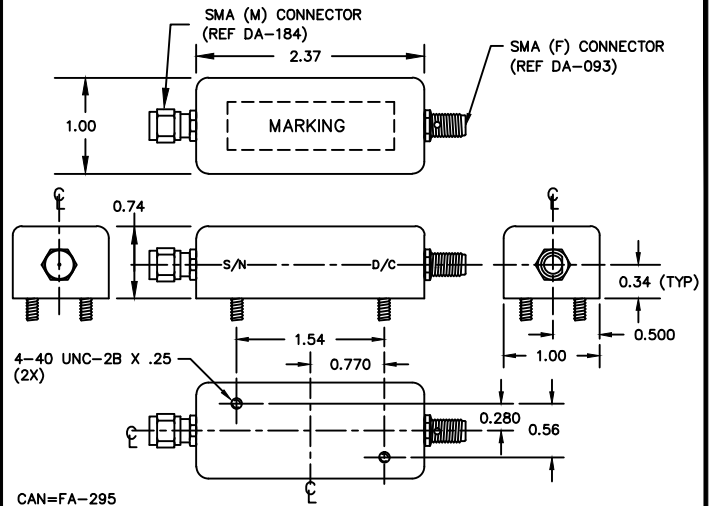

NOTE:  
SHIP WITH 4-40 LOCKWASHERS  
AND HEX NUTS.

FN-4570WK

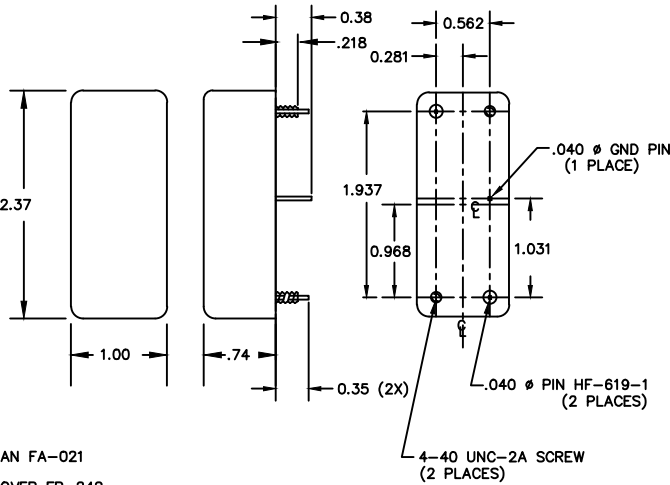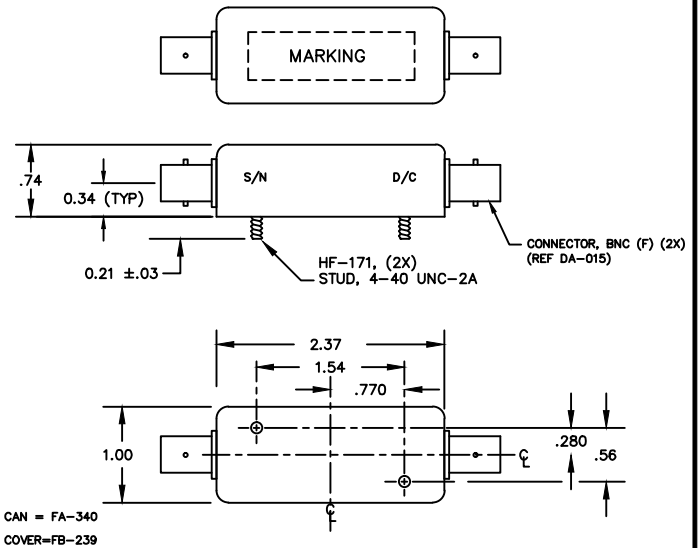

FN-4570WD

FN-4570W DRAWING SUMMARY

**FILTRONETICS, INC.**

6010 PARRETTA DR.  
KANSAS CITY, MO 64120

816-231-7375

FAX 816-241-0368

WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020

.XXX = ± .010

ANGLE = ± 1°

HOLES = ± .002

REVISED

FN-4570WLL

