
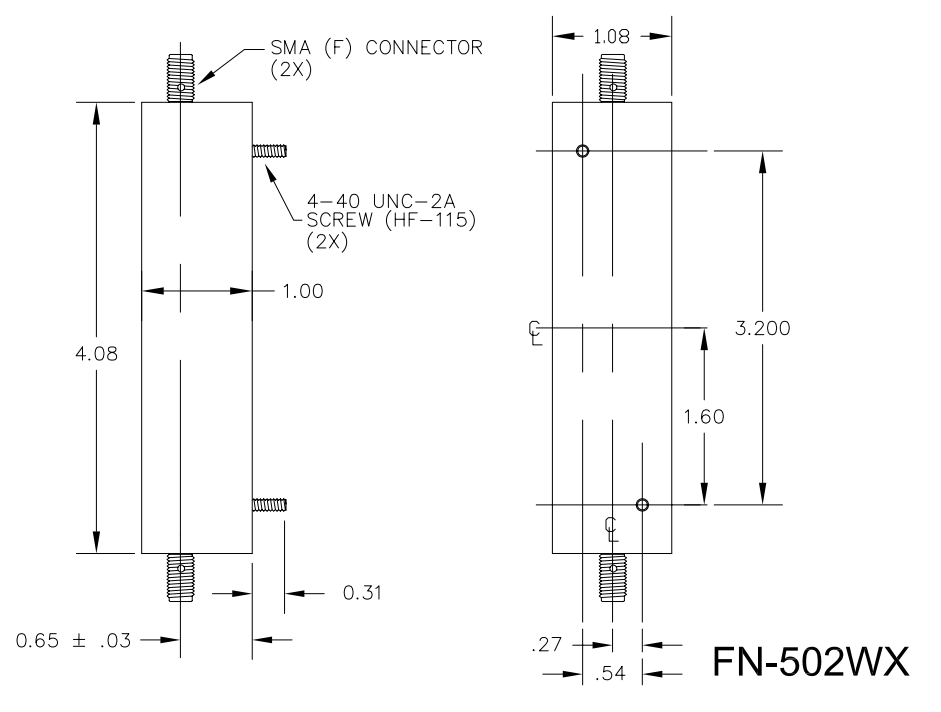


BANDSTOP FILTER

Fo: 1.056 MHz
IMPEDANCE : 75 ohm IN/OUT
INSERTION LOSS: 0.5 dB MAX
RIPPLE (± 2 KHz): 0.5 dB MAX
3dB BANDWIDTH: 220 KHz MAX
60dB BANDWIDTH: 40 KHz MIN
OPERATING TEMPERATURE : +15°C to +35°C

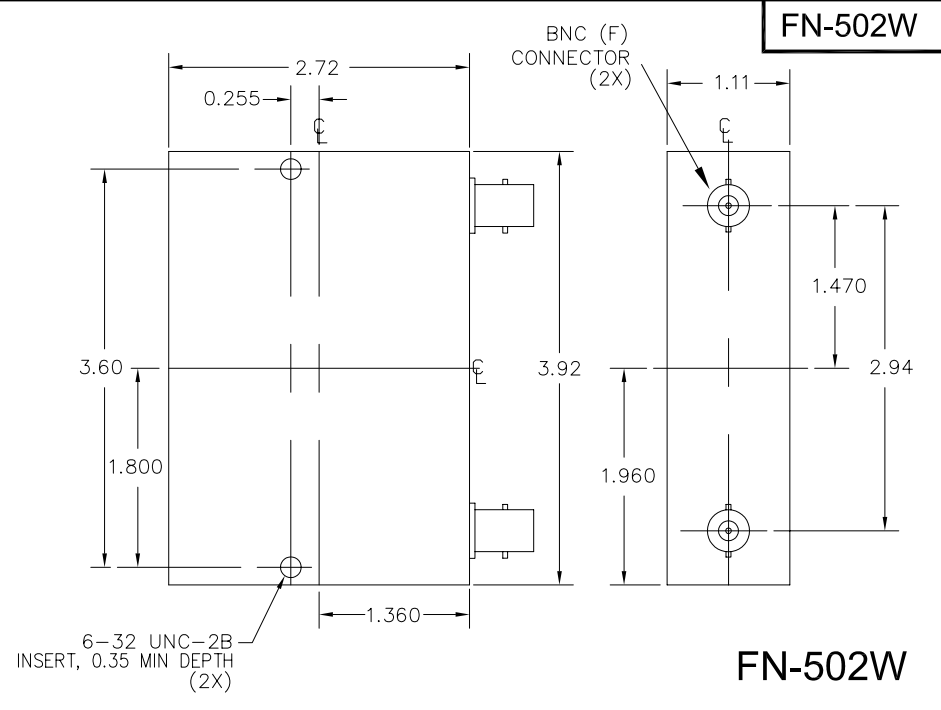

FN-502W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

| | |
|-----------------------|------------|
| ANGLE = $\pm 1^\circ$ | HOLES |
| .XX = $\pm .020$ | $\pm .002$ |
| .XXX = $\pm .010$ | |

REVISED 11/3/03