



LOWPASS FILTER

1 dB CUTOFF: 5.25 MHz
 IMPEDANCE : 75 OHM (IN/OUT)
 INSERTION LOSS: 1.0 dB MAX
 RIPPLE: 0.2 dB MAX
 30 dB STOPBAND: 6.2 MHz
 GROUP DELAY RIPPLE (1.5 to 4.2 MHz): 10 nSEC MAX
 DELAY RIPPLE BETWEEN 2.58 & 4.58 MHz: 20 nSEC MAX
 OPERATING TEMPERATURE : -20°C to +70°C

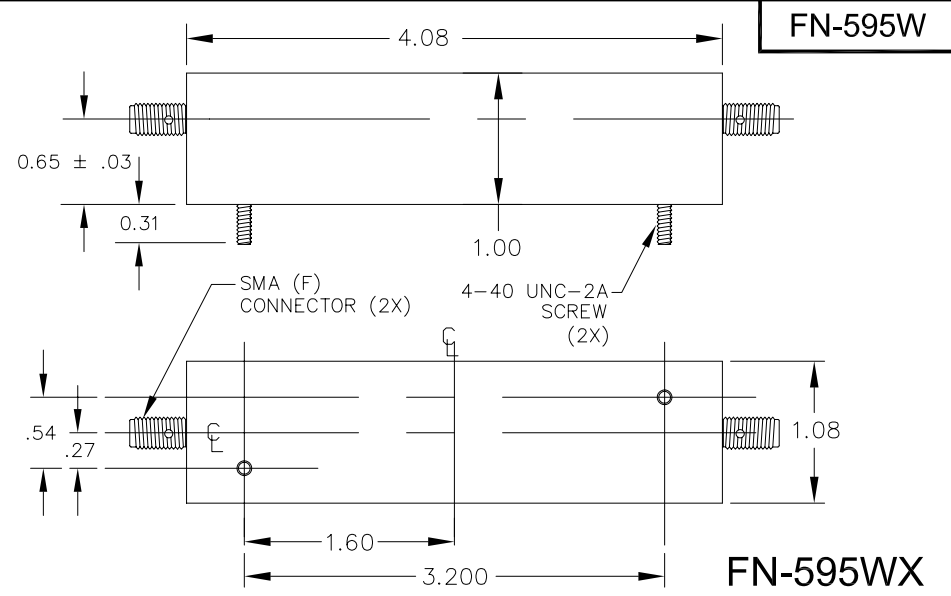


FN-595W

FN-595WX

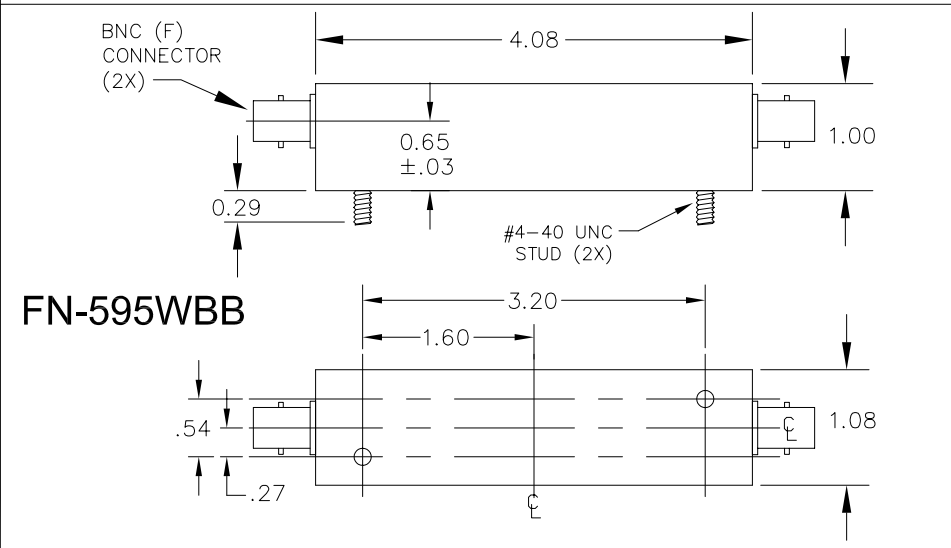

FN-595WBB

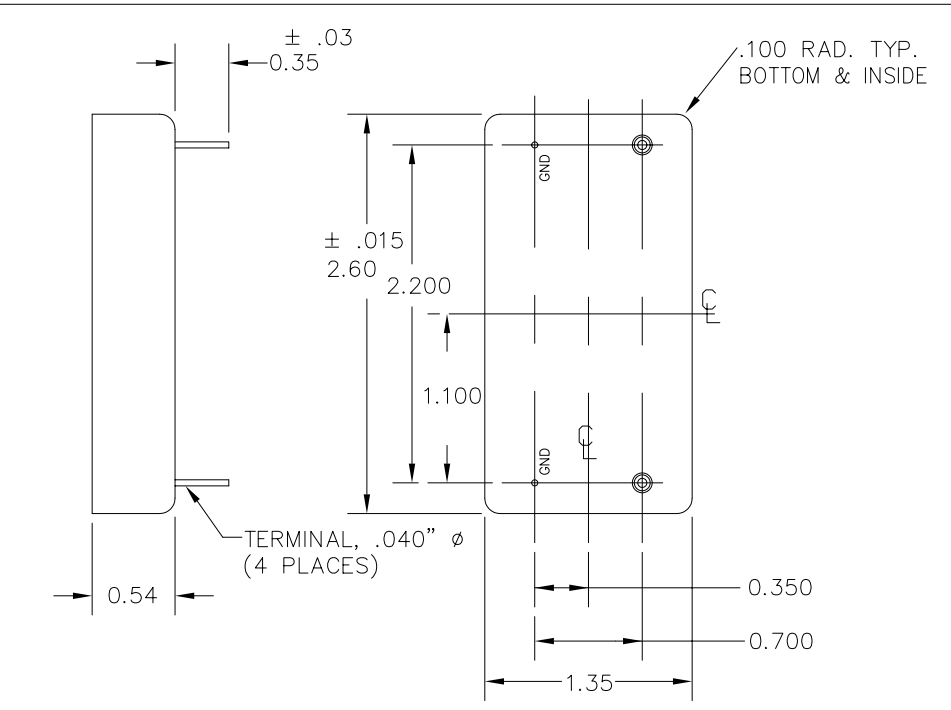

FN-595W

FN-595W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
ANGLE = ± 1°	HOLES ± .002
.XX = ± .020	
.XXX = ± .010	
REVISED 10/20/03	