



LOWPASS FILTER

3 dB CUTOFF: 20.5 MHz
 IMPEDANCE : 50 OHM (IN/OUT)
 INSERTION LOSS: 1.0 dB MAX
 RIPPLE: 0.4 dB MAX
 40 dB STOPBAND: 25 MHz
 OPERATING TEMPERATURE : -20°C to +70°C


FN-750W

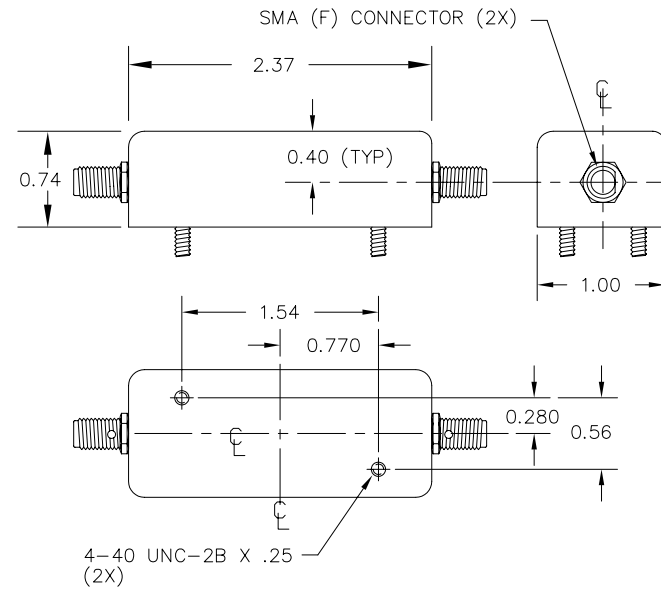

FN-750WF

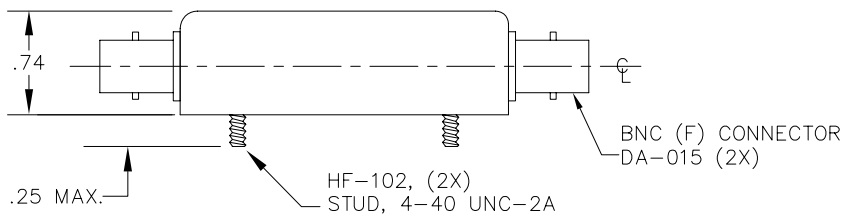

FN-750WK

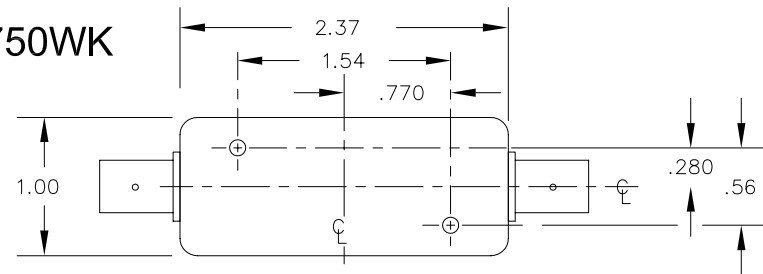

FN-750WC

FN-750W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 11/3/03