

SPECIFICATION
COMMERCIALY AVAILABLE

SAW BAND PASS
PART NUMBER:SF0093048
RoHS


ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN
5/16/16 ^(kn)			

FILTRONETICS Inc

1. Electrical Specifications:


	UNIT	MIN	TYP	MAX
Center Frequency	MHz	-	93.75	-
Insertion Loss	dB	-	23.0	28.0
-1dB Bandwidth	MHz	48.0	-	-
-35dB Bandwidth	MHz	-	58.0	75.0
Group Delay Variation	ns	-	50	-
Ultimate Rejection	@ 60MHz	40.0	45.0	-
	@ 130MHz	35.0	38.0	-
Package	mm	SMD-24 (13.3 * 6.5)		
Maximum DC Voltage	V	10.0		
Maximum Input Power	dBm	+10		
Operating Temperature	°C	-40°C to +85°C		
Storage Temperature	°C	-40°C to +85°C		

2. Dimension:

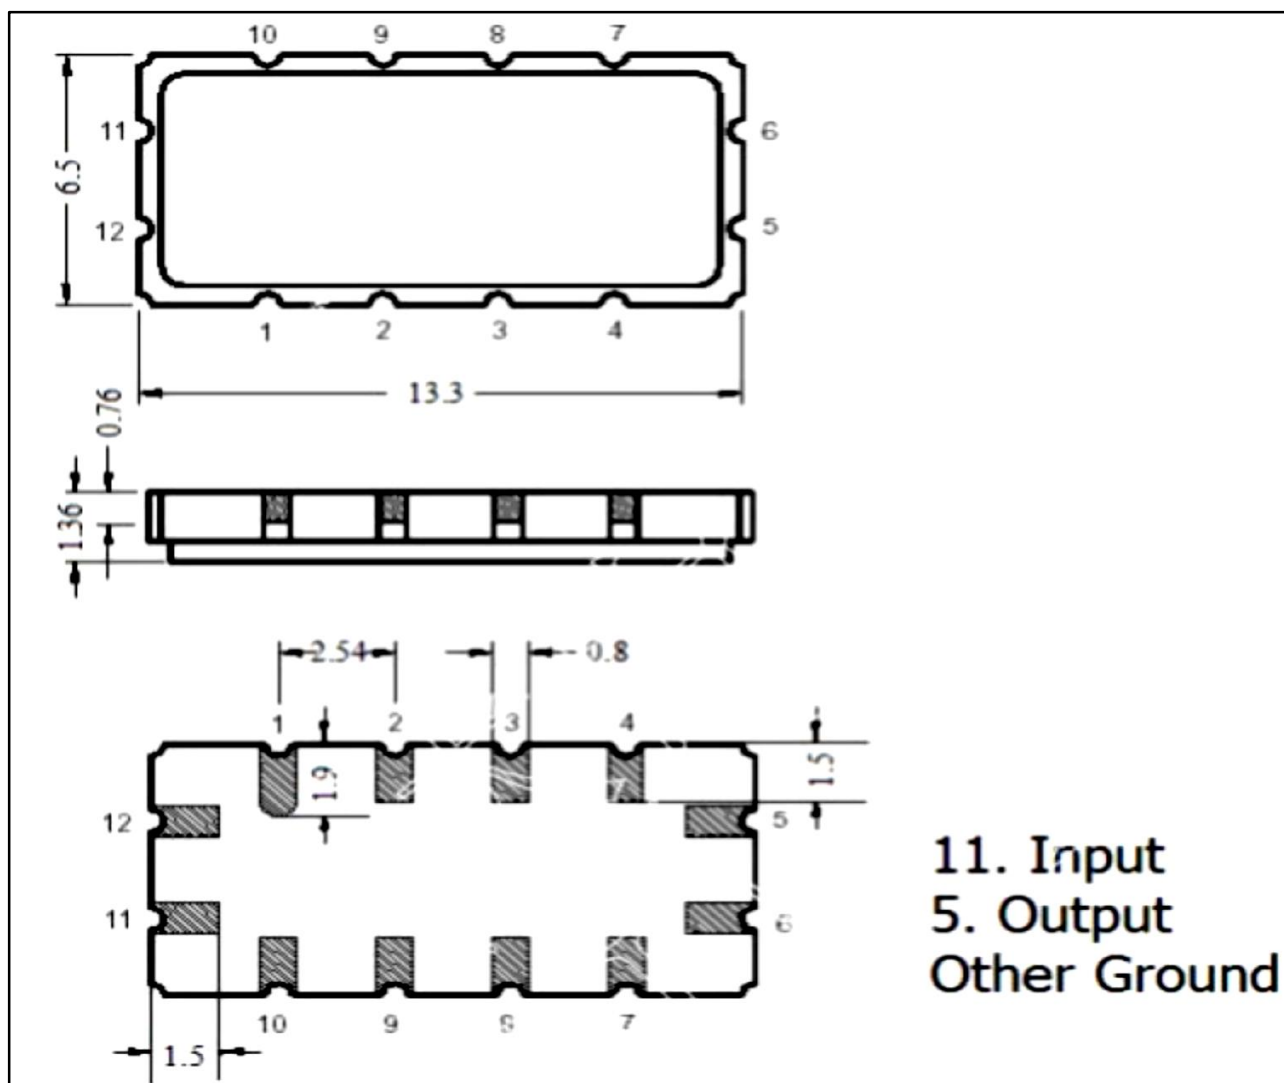

Test Circuit – Note: Need extra matching circuit, TBD for Specific values C & L

3. Response: (only for reference)

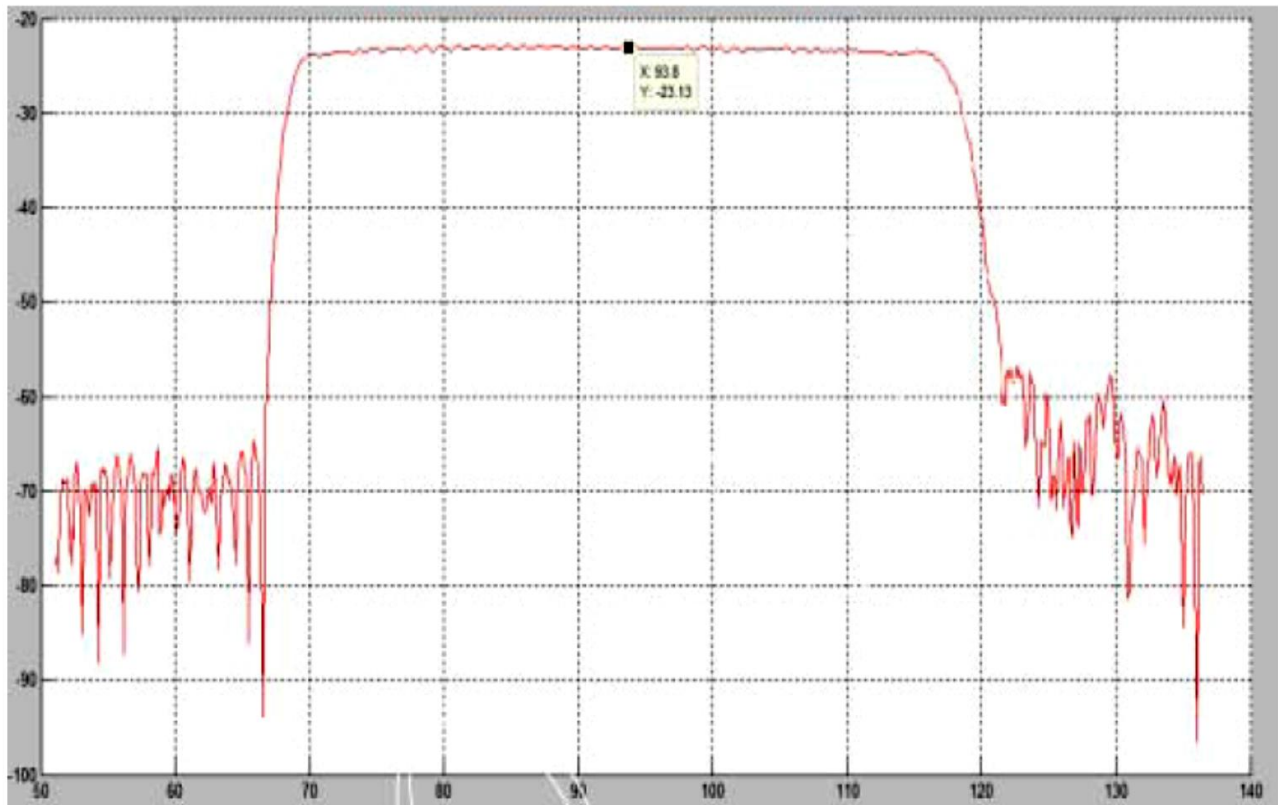

Cautions:

1. Static Voltage:

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

2. Ultrasonic Cleaning:

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

3. Soldering:

Only leads of component may be soldered. Please avoid soldering another part of component.

Environmental Characteristics	
High Temperature Exposure	Subject the device to +85°C for 16 hours. Then release the filter into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications.
Low Temperature Exposure	Subject the device to -40°C for 16 hours. Then release the device into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications.
Temperature Cycling	Subject the device to a low temperature of -40°C for 30 minutes. Following by a high temperature of +85°C for 30 minutes. Then release the device into the room conditions for 24 hours prior to the measurement. The device shall meet the specifications.
Resistance to solder heat	Dip the device terminal no closer than 1.5mm into the solder bath at 260°C ±10°C for 10±1 sec. Then release the device into the room conditions for 4 hours. The device shall meet the specifications.
Solderability	Subject the device terminals into the solder bath at 245°C ±5°C for 5s. More than 95% area of the terminals must be covered with new solder. It shall meet the specifications.
Mechanical Shock	Drop the device randomly onto the concrete floor from the height of 1 m 3 times. The device shall fulfill the specifications.
Vibration	Subject the device to the vibration for 1 hour each in x , y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The device shall fulfill the specifications.