

1. Part Number: SF-040063A


2. Electrical Specifications:

Fo (MHz)	39.98 MHz +/- 0.1
Insertion loss	20 to 23 dB *
3dB bandwidth	6.3 MHz Min
40dB bandwidth	8.9 MHz Max
Pass band variation	0.6 dB Max
Ultimate rejection	40 dB Min
Group Delay Variation	60 nsec

NOTE:

* Insertion loss is based on with no impedance match. Impedance match will improve IL and degrade Group Delay

3. Mechanical Package:

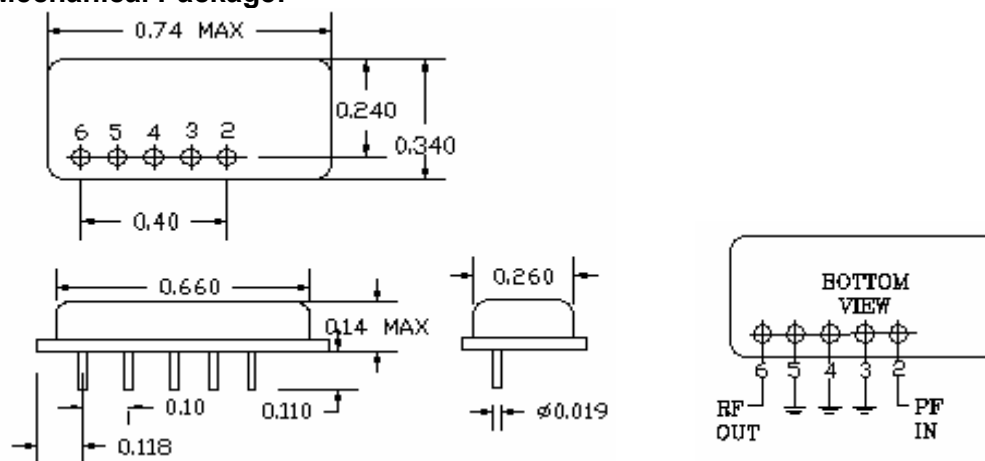

4. Plots:

TBD