

SPECIFICATION

COMMERCIALY AVAILABLE

SAW BAND PASS
PART NUMBER: SF460200A
RoHS

ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN
4/4/07**			
5/24/13 ^(kn)	05/29/2013 TFG	05/29/2013 TFG	05/29/2013 GL


FILTRONETICS Inc

1. Electrical Specifications:

Index	Unit	Min	Typical	Max	
Center Frequency	MHz	-	460.0	-	
2dB Bandwidth	MHz	20.0	23.4	-	
Insertion Loss	dB	-	1.5	2.8	
Attenuation: (Reference Level from 0dB)	Fc -45 ~ Fc -100MHz	dB	40.0	56.0	-
	Fc +45 ~ Fc +55MHz	dB	30.0	56.0	-
	Fc +55 ~ Fc +100MHz	dB	40.0	54.0	-
Temperature Coefficient of Frequency	ppm/K	-	-36.0	-	
Package	mm	5.0 x 5.0 x 1.7			

Marking:
SF460200A
Date Code


2. Dimension:

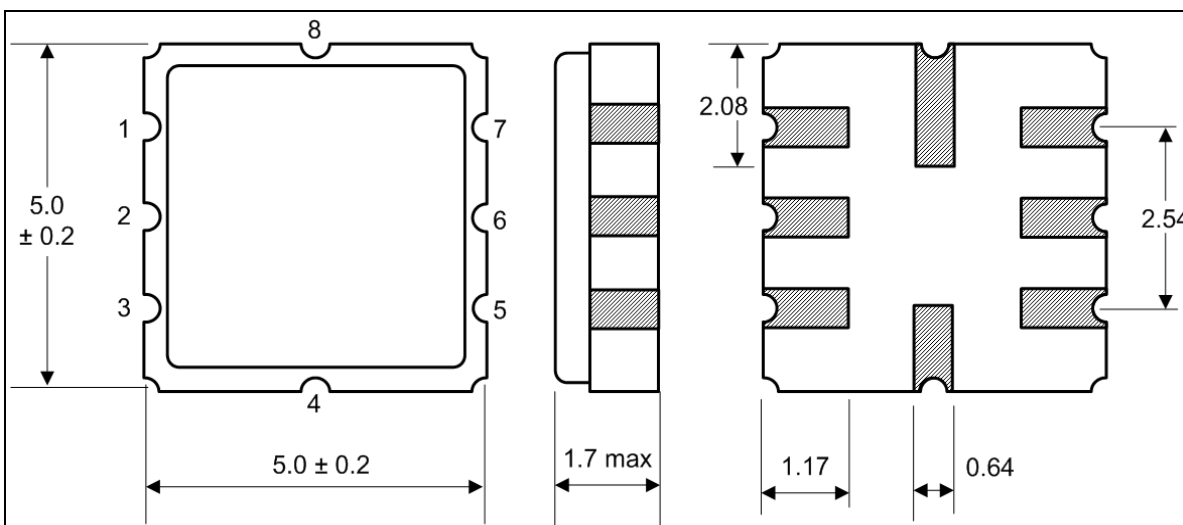

2: Input
6: Output
1, 3, 4, 7, 8: Ground

Marking:
SF460200A
Date Code

Matching Configuration

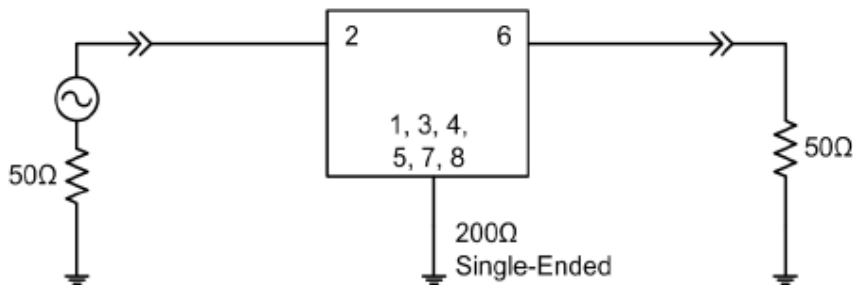

No Matching Required
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

3. Typical Performance:

