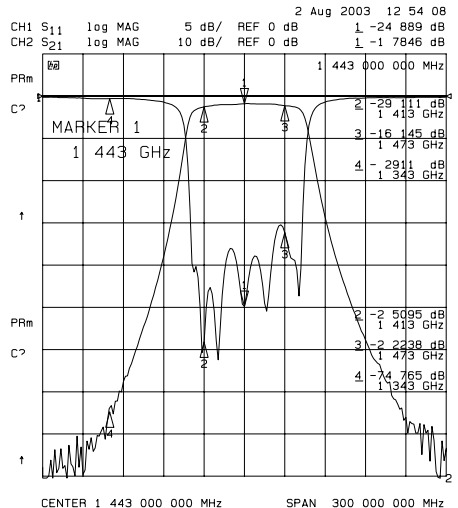


CERAMIC BANDPASS FILTER

CF-14430607W


1. SPECIFICATIONS

No	Item	Specification	Note:	
1	Center Frequency (Fc)	1443 MHz		
2	Band Width (BW)	$F_c \pm 30$ MHz		
3	Insertion Loss(IL) in BW	3.2 dB Max		
4	Ripple in BW	1.0 dB Max		
5	Attenuation (ATT)	$F_c - 100$ MHz		60.0 dBc Min
		$F_c + 100$ MHz		60.0 dBc Min
6	Return Loss(RL) in BW	12.0 dB Min		
7	Group Delay Variation(GD) in BW			
8	Impedance	50 Ohms		
9	Maximum Input Power	1 W		
10	Operating Temperature	- 20 to 60 °C		

2. DIMENSIONS

Unit : mm

Tolerance : +/-0.3mm

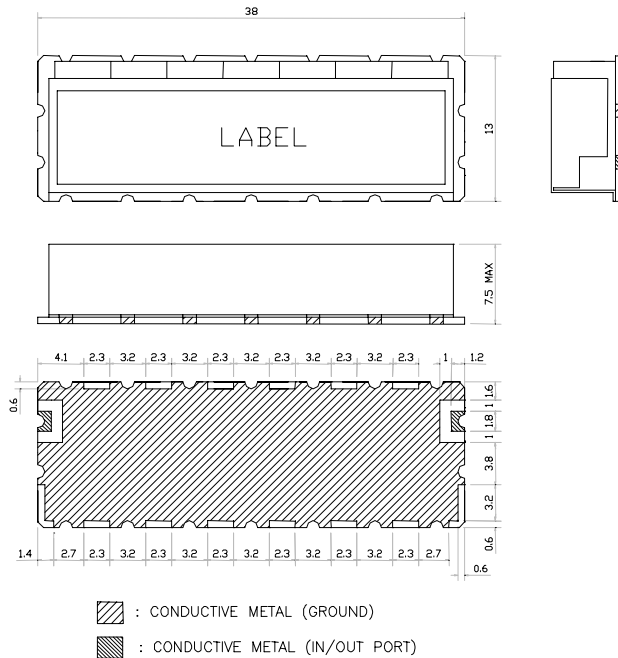

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

CF-14430607W DRAWING SUMMARY

REVISED 9/5/2003