



FN-1136W

**BANDSTOP FILTER**

Fo: 30.0 MHz  
 IMPEDANCE : 50 OHMS (IN & OUT)  
 INSERTION LOSS: 4 dB MAX  
 RIPPLE: 1 dB MAX  
 3dB BANDWIDTH: ± 3 KHz MAX  
 PASSBAND: ±4 MHz AT 3 dB MAX  
 40dB BANDWIDTH: ± 250 Hz MIN  
 OPERATING TEMPERATURE : 0°C to +50°C

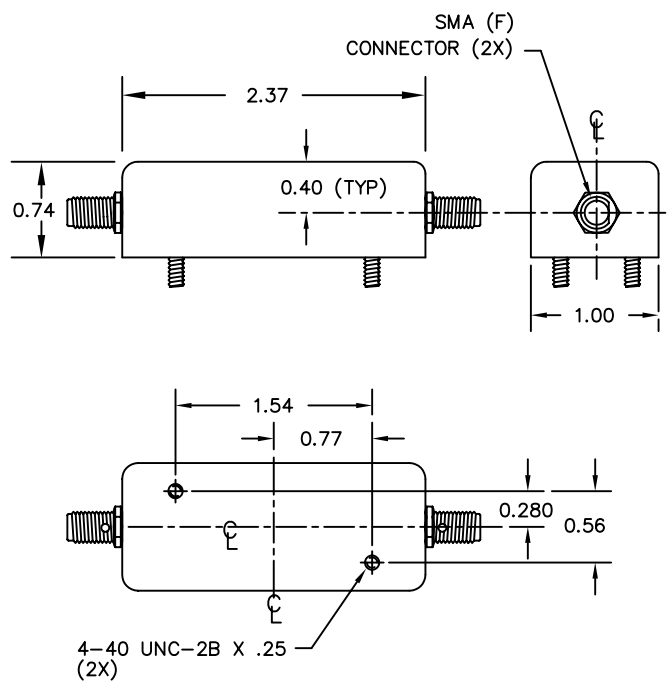

FN-1136WF

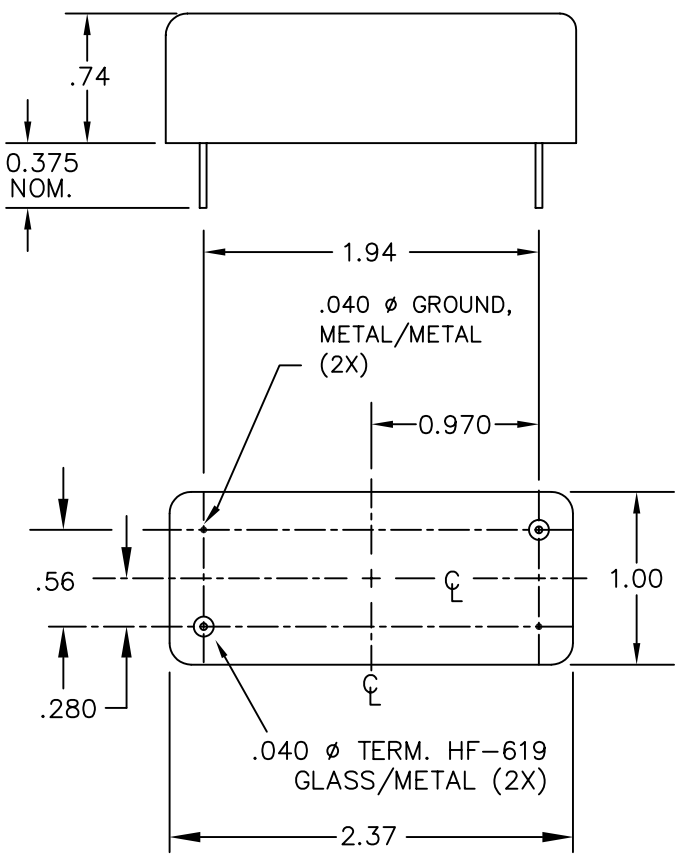

FN-1136WA

**FN-1136W DRAWING SUMMARY**

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020  
.XXX = ± .010

ANGLE = ± 1°  
HOLES = ± .002

REVISED 8/7/12