


BAND PASS FILTER

CENTER FREQUENCY (Fo) : 10.7 MHz  
3 dB BAND WIDTH: 2.25 MHz MIN  
INSERTION LOSS: 3.0 dB MAX  
PASS BAND RIPPLE: 1 dB MAX  
40 dBc BAND WIDTH: 5.5 MHz MAX  
INPUT POWER: 0 dB MAX  
IMPEDANCE : 50 OHMS  
OPERATING TEMPERATURE : -30° C TO +70° C  
WORKMANSHIP: J-STD-001 CLASS 2  
RoHS COMPLIANT: NO

FN-4194W

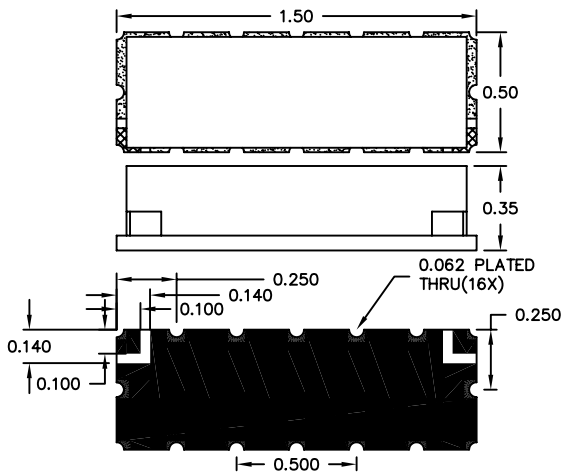

CAN = FA-621

FN-4194W DRAWING SUMMARY

**FILTRONETICS, INC.**  
6010 PARRETTA DR.  
KANSAS CITY, MO 64120  
816-231-7375  
FAX 816-241-0368  
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020  
.XXX = ± .010

ANGLE = ± 1°  
HOLES = ± .002

REVISED 01/25/2013