

SPECIFICATION**COMMERCIALY AVAILABLE**

ITEM: SAW FILTER
 PART NUMBER: SF060018

Revision Made: Added Graph

Revised per ECO 4413: Added square corner orientation note.

ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN
3/15/05 **			
10/13/10 DS	10/13/2010 SRJ	10/13/2010 BF	10/14/2010 GL
01/24/2013 GL	01/24/2013 TFG	01/24/2013 TFG	01/24/2013 GL

FILTRONETICS Inc

1. Part Number: SF060018



2. Electrical Specifications:

Fo	60 MHz ±0.1 MHz
Insertion loss at Fo	21 dB Max
1 dB bandwidth	1.4 MHz Min
3 dB bandwidth	1.9 MHz Max
50 dB bandwidth	4.0 MHz Max
Pass band variation	0.5 dB Max
Ultimate rejection	50 dB Min
Spurious	40 dB Min

3. Mechanical Package:

Marking:
SF0600

* Note:
Square corner denotes orientation.

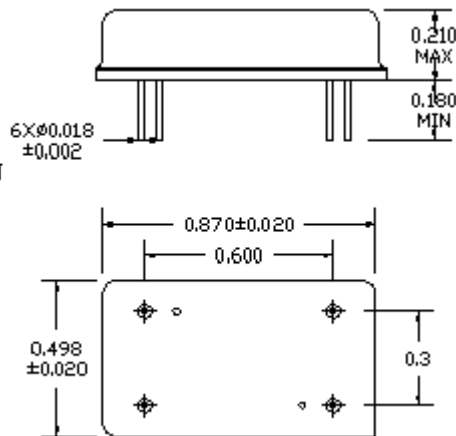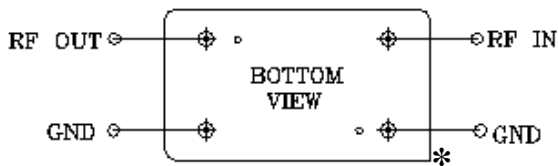

No Matching Required
Source/Load Impedance=50ohm
Package Style XI

4. Graphs:

