

SPECIFICATION

COMMERCIALLY AVAILABLE

CERAMIC FILTER
PART NUMBER: CF-20201005A

ISSUED / REVISION	ENGINEER APPROVED	DOCUMENT CHECKED	DRAFTSMAN	DOCUMENT CHECKED
8/20/08 **	3/10/2010 SRJ	3/10/2010 BF		
7/1/11 DS	09/11/2012 TFG		09/11/2012 GL	
FILTRONETICS Inc				

1. APPLICATION



THIS SPECIFICATION APPLIES TO BAND PASS FILTER USING DIELECTRIC RESONATORS.

2. PART NUMBER


PART NO	CF-20201005A
PACKAGING	PLASTIC TRAY


3. SPECIFICATIONS

No	ITEMS		SPEC
1	Center Frequency (Fo)		2020 MHz
2	-1 dBc Bandwidth (BW)		Fo +/- 50MHz Min
3	Insertion Loss	Fo	1.75 dB Max
4	Ripple	@ Fo+/-50 MHz	1.0 dB Max
5	Return Loss	@ Fo+/-50 MHz	12 dB Min
6	Rejection	@ 1460 MHz	50 dBc Min
		@ 1910 MHz	30 dBc Min
		@ 1940 MHz	16 dBc Min
		@ 1950 MHz	10 dBc Min
		@ 2100 MHz	15 dBc Min
		@ 2140 MHz	30 dBc Min
7	Impedance		50 Ω
8	Maximum Input Power		1 W
9	Operating Temperature Range		-20 to +50°C

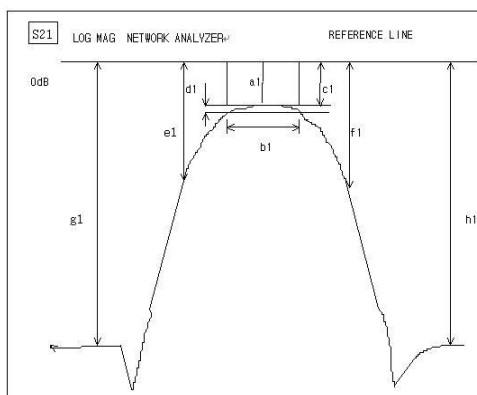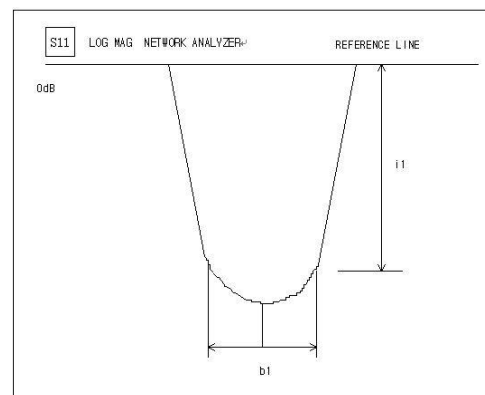S21 LOG MAG NETWORK ANALYZER**S11 LOG MAG NETWORK ANALYZER**

4. GRAPHS

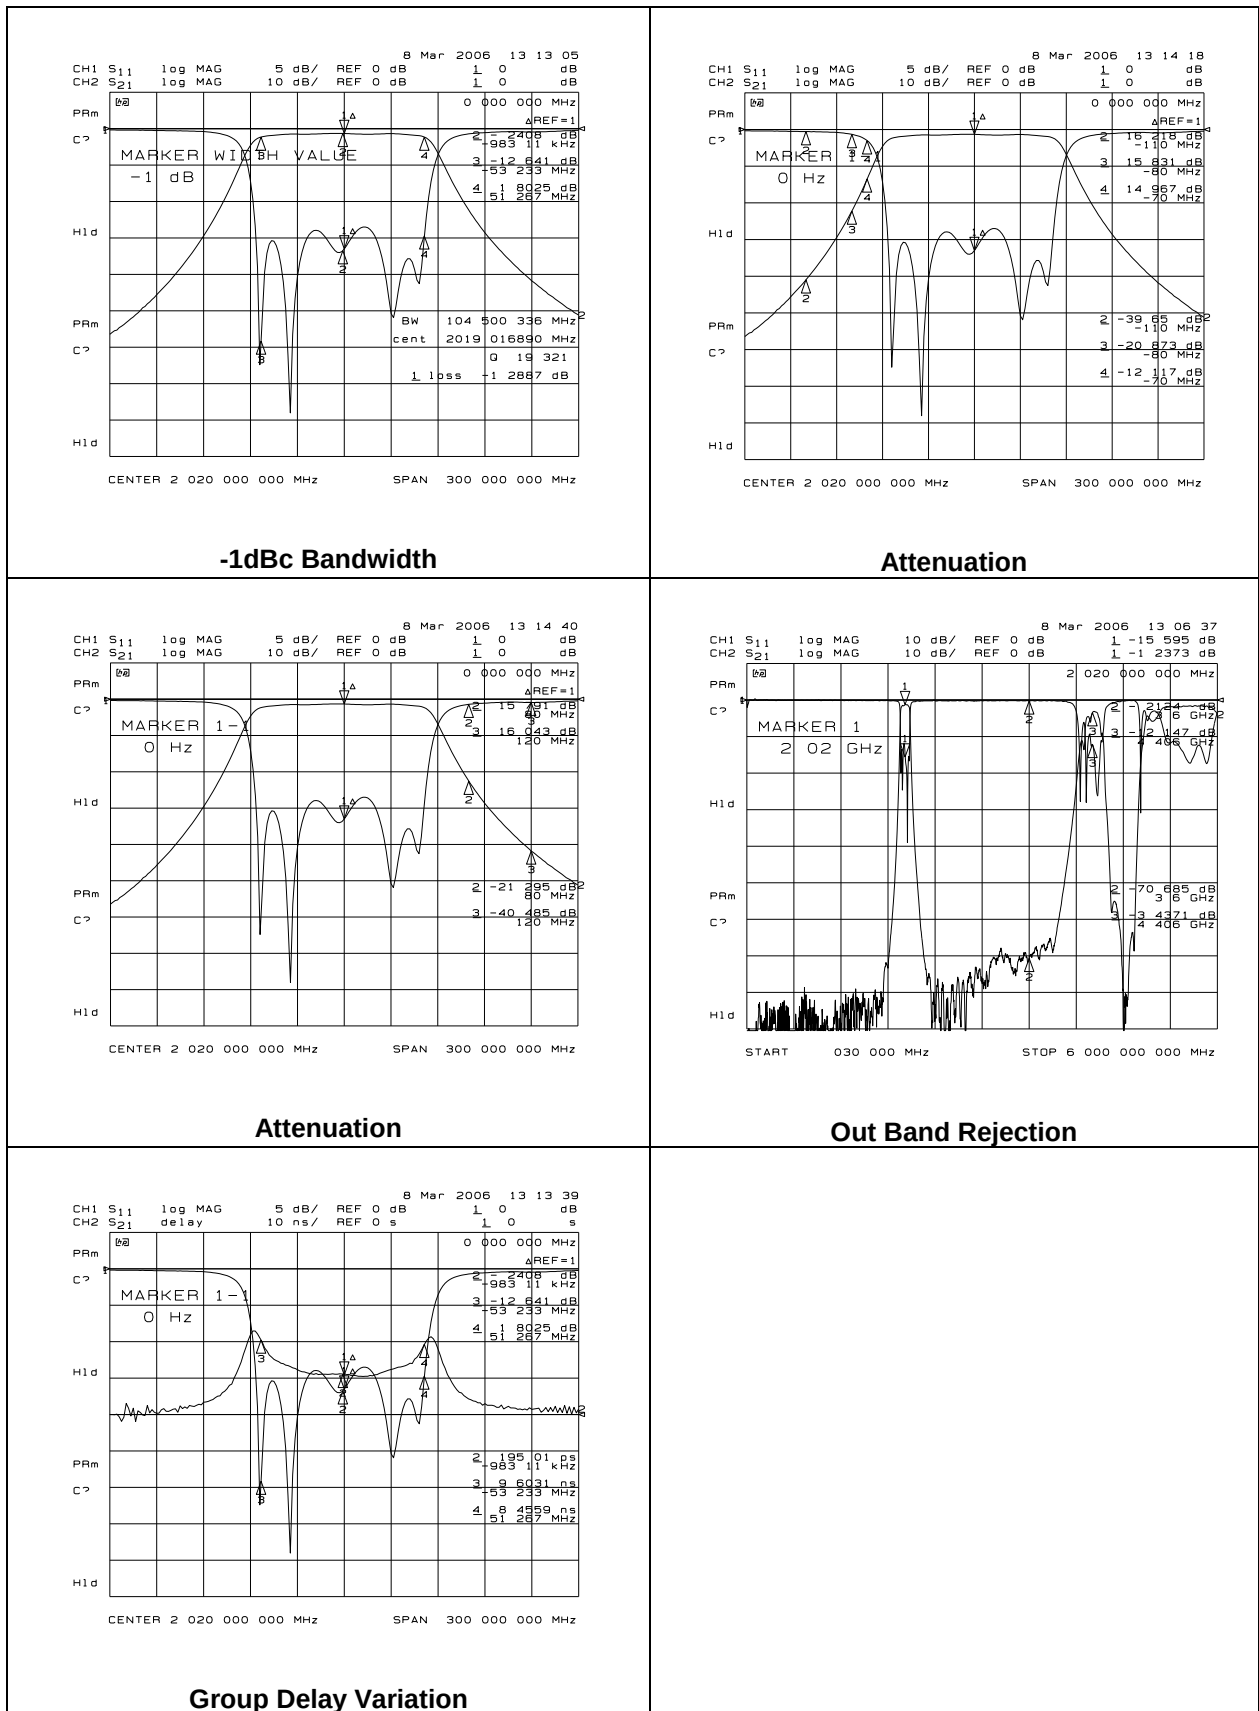

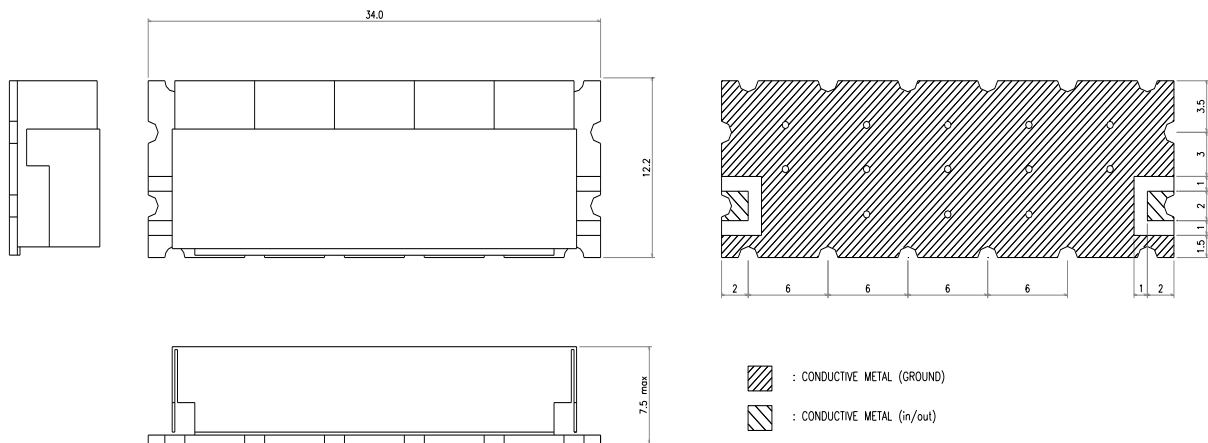


6. DEFINITIONS

TERMS	DESCRIPTION	SPECIFICATION
Center Frequency	The midpoint of through band pass filter pass band, normally expressed as the arithmetic mean of the -3dB point. Also called Fo.	3. SPECIFICATION
Pass Band Width	The width of the pass band of a filter referenced to the minimum insertion loss point in the pass band. The pass band of a filter is stated as -1.0dB bandwidth.	
Insertion Loss	The loss of the filter, in dB, measured at center frequency relative to a through line (0 dB).	
Attenuation	Reduction of RF power through a filter measured in dB, at desired band and referenced to 0 dB. (Filter to be removed from circuit)	
Pass Band Ripple	Variations in loss in the pass band of the filter, superimposed upon the fundamental shape of the pass band.	
V.S.W.R in Pass Band	The ratio of the maximum value of a standing wave to its minimum value, related to the return loss in pass band.	

7. RELIABILITY TEST AND CONDITIONS

ITEM	TEST CONDITIONS	REQUIREMENTS
Resistance to solder heat	Preheat temperature : 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 260 +/- 10°C Dipping time: 10 +/- 0.5 sec	No damage such as cracks should be caused in chip element.
Solderability	Preheat temperature: 120 to 150°C Preheat time: 1 to 1.5 min Solder temperature: 235 +/- 5°C Dipping time: 5 +/- 1 sec	More than 80% of the terminal electrode shall be covered with new solder
Heat resistance (High-temperature Load)	Temperature: 85 +/- 2°C Applied voltage: Rated voltage Applied current: Rated current Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Thermal shock (Temperature cycle)	Conditions for 1 cycle Step 1: + 85°C 15 min Step 2 : - 30°C 15 min Number of cycle: 10	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Humidity Resistance	Temperature: 40 +/- 2°C Humidity: 90 to 95% RH Duration: 96 +/- 5 hrs Recovery: 1 to 2hrs of recovery under the standard condition after the removal from test chamber.	No mechanical damage. After test, the device shall satisfy the specification in section 3.
Vibration	Frequency: 10 ~ 50 Hz Amplitude: 1.52 mm (0.060 inches) Direction: X, Y and Z Time: each 30 min for all directions	No mechanical damage. After test, the device shall satisfy the specification in section 3.

8. REFLOW SOLDERING STANDARD CONDITIONS

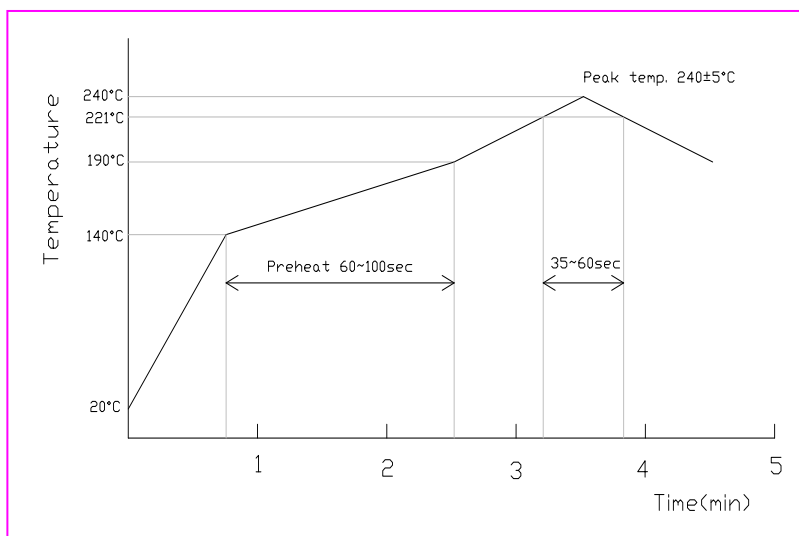

- Measuring point of temperature in-out terminals of the device.
- Reflow Soldering
- Both convection and infrared rays
- Hot air
- Solder Cream: Sn96.5/Ag3.5